

"MCWL" SERIES SUSPENDED CRANE SCALES




Light and reliable portable crane scale, with Peak, Hold or Totalizer function, internal battery with extractable drawer, easily replaceable and with long life. Fitted with approved shackles, infrared remote control, and case. The TRIPLE AUTOMATIC READING RANGE gives top accuracy for the lower weight values..


Available also in CE-M approved version

MAIN FEATURES

- 25 mm LCD display easily visible also in low temperatures;
- Fitted with galvanised shackles
- Accuracy: +/- 0.03% of the applied load.
- Waterproof keyboard with 4 keys: ON/OFF ZERO/ SELFWEIGHED TARE, F1, F2;
- Configurable function at choice between PEAK (maximum value detected), totalization, or HOLD (block of displayed weight);
- Container in oven-fire painted steel.
- Fitted with remote control for up to a distance of 8m. The remote control may be configured by the customer as automatic tare only or as a 4-key remote keyboard.
- Configuration and calibration from PC (**easy connection through the 9 pin connector** on the lower part of the case).
- User calibration from keyboard.
- Operating temperature: -10 /+40 °C
- Programmable digital filter and auto switch-off.
- Safe overload: 200% f.s., Ultimate overload: 500% f.s.
- Protection from knocks and overloads (Safety factor: K=5).
- Fitted with 9v alkaline battery (non rechargeable), with 35-hour operating time of continuous functioning (or up to 3 months of typical non-continuous use, thanks to the auto switch-off function)
- Fitted with storage case with dimensions of: 41 x 26 x 24 cm
- Weight of the storage case with crane scale:
 - MCWL600/T1M: 8 kg
 - MCWLT6/MCWLT6M: 10 kg
 - MCWLT10: 15 kg

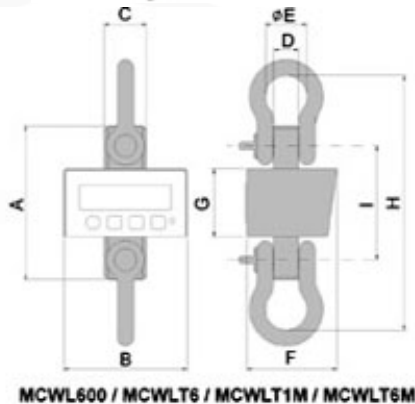

MCWL600 / MCWLT6 / MCWLT1M / MCWLT6M

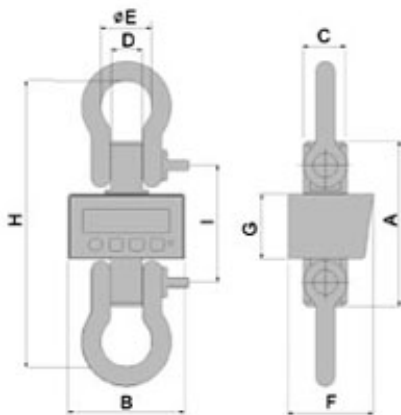

MCWLT10

	A	B	C	D	E	F	G	H	I
MCWL600/T1M	184	171	49	24	43	125	94	291	144
MCWLT6/T6M	214	171	59	33	58	125	94	353	158
MCWLT10	241	171	64	46	75	125	94	419	171

dimensions in mm

NOTES

- WARNING: THE NOMINAL LOAD OF THE HOOK AND CONNECTION RING MUST BE EQUAL OR MORE THAN THE MAXIMUM LOAD WHICH CAN BE APPLIED TO THE SCALE.

Versions available

Code	Max Capacity	Division kg	CE-M Division kg
MCWL600	150 / 300 / 600	0,05 / 0,1 / 0,2	

MCWLT6	1500 / 3000 / 6000	0,5 / 1 / 2	
MCWLT10	3000 / 6000 / 9500	1 / 2 / 5	
MCWLT1M M	200 / 500 / 1000		0,2 / 0,5 / 1
MCWLT6M M	1500 / 3000 / 6000		1 / 2 / 5

N.B. The MCWLT10 is fitted with 9,5 t shackles each

Options to be specified when ordering

Code Description

TECMAN	Printed technical manual (downloadable from the web, free) NET PRICE
UMAN	Printed user manual (downloadable from the web, free) NET PRICE

Accessories

Code Description

GG1T5	Swivelling bottom hook with safety lock 1.5 t
GG7	Swivelling bottom hook with safety lock 7 t
GG15	Swivelling bottom hook with safety lock 15 t



CA2	Connection ring 2.5 t
CA8	Connection ring 8 t
CA15	Connection ring 15 t



Measurements of hooks and rings

Code	Dimensions (mm)			
	A	B	C	D
GG7	82	266	77	338
GG15	95	354	96	455
CA2	86	60	110	
CA8	152	100	180	
CA15	174	110	200	



Fitted with storage case

Mobile Weighing price list MAY 2007
Category M07 ver 1.0

Dini Argeo S.r.l. -
 Copyright 2002-2007 - All Rights Reserved.
www.diniargeo.com