

## 375 CHECKWEIGHER

Checkweighing solutions for food processing and beyond.

*Technical Specification*



### DESCRIPTION

Certified by NSF to NSF/ANSI Standard 3-A and with IP69K approval, the Avery Weigh-Tronix ZQ375 Checkweigher is a fast and easy solution for food environments and beyond.

Fully stainless steel construction with minimal food trap areas for ease of cleaning.

High and low capacity base designs automatically transfer shock loads and overloads away from the load cell.

From straightforward checkweighing to complete visibility of weighing data and statistics, the ZQ375 provides you with the information you need through Wireless, USB or Ethernet to maximise performance and profitability.

### SPECIFICATIONS

#### OPERATING APPLICATIONS


<b>Quick Check Application</b>	± Target check mode with adjustable 6 segmented red under, orange over and large green accept bar.
<b>Gross/Net Checkweighing Application</b>	Gross/net checkweighing mode with adjustable segmented red under, orange over and green accept bar. Built in transaction counter. Pack run. Configurable standard deviation and Xbar R.
<b>Advanced Checkweighing Application</b>	500 PLU storage, weight and percentage checkweighing settings with fully adjustable segmented red under, orange over and green accept, under over alarms. Full range of built in statistical packages, transaction counter, pack run, custom and standard deviation data capture, Xbar R, negative checkweighing and auto tare.
<b>Grading Application</b>	Up to 10 easy-to-set grading bands

## GENERAL


<b>Unit of Measure</b>	Three independently configurable (Pounds, Kilograms, Ounce, Gram, Pound/Ounce, Custom)
<b>Capacity Selections</b>	Base capacities 5lb to 500lb (3kg to 200kg) configurable 999,999 with decimal located zero to five places
<b>Incremental Selections</b>	Multiples and sub-multiples of 1, 2, 5
<b>Programmable Selections</b>	Zero range, motion detection, automatic zero tracking, five point linearization
<b>Time and Date</b>	Battery backed up time/date/year (12 hour or 24 hour format)
<b>Calibration</b>	Two to five points stored
<b>Analog to Digital Measurement Rate</b>	80 Hz
<b>Internal Resolution</b>	53,687,100 counts per mV/V per second
<b>Digital Filtering</b>	Harmonizer filtering with adaptable constant and threshold
<b>Self Diagnostics</b>	Display, keys, inputs, outputs, serial port, installed options, and last 10 Error messages

## USER INTERFACE

<b>Keypad</b>	Ten button knife and chemical resistant with audible keypress feedback
<b>Operational Keys</b>	Zero, Tare, Print, Select, Units, Under, Target, Over, ID, F1 Function
<b>Status Annunciators</b>	Zero, Motion, Gross, Net, Tare, Count, Print, Battery Status, Set Point 1/2/3, Over/Under/Accept bar graph, lb, kg, gram, oz, Preset Tare, Percentage, Active Ethernet connection
<b>Display</b>	IBN illuminated, 0.8" (20mm) high 8-digit, nine segment display, green on black background for indoor use. Bar graph: 6 red under segments, large green accept segment and 6 orange over segments. 22 annunciators for status and mode identification.
<b>Display Rate</b>	Selectable (1,2,5,10) times per second

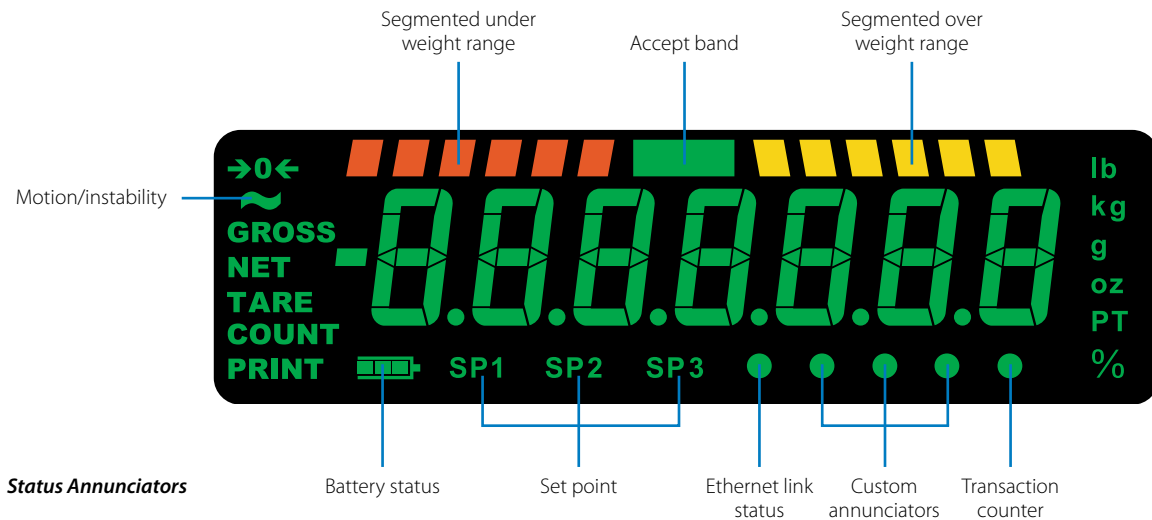

Status Annunciators

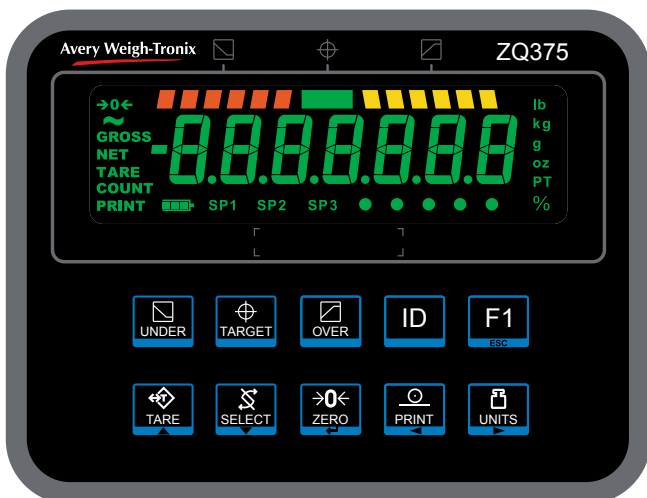


Keypad - 10 keys

## PHYSICAL

<b>Enclosures</b>	Certified by NSF to NSF/ANSI Standard 3-A 14159-1 -2010, food-grade 304 brushed stainless steel enclosure (IP69K certified) with GORE® Vent ventilation and column-mounted to a range of stainless steel pickled and electropolished IP66 and IP69K bases.
<b>Operating Temperature</b>	14° F to 104° F / -10° C to 40° C (Approvals) at 10 to 90% humidity -4° F to 140° F / -20° C to 60° C (industrial) at 10 to 90% humidity
<b>Humidity</b>	10% to 90% relative, non-condensing
<b>Base Construction</b>	Easy to clean, certified by NSF to NSF/ANSI Standard 3-A, fully stainless steel food-grade 304 brushed base construction with pickle and polish weigh pan and column suitable for food contact areas. Designed with breakaway load transfer system to help fully protect the loadcells from unwanted overloads and shock loads.
<b>Overload Protection</b>	<i>Torsion base:</i> 500% <i>Diamond base:</i> 150%
<b>Corner Loading</b>	100%
<b>IP Protection</b>	<i>Torsion base BSG:</i> IP65 (NEMA 4X) <i>Torsion base BSF:</i> IP69K <i>Diamond base BS:</i> IP69K
<b>Approved Accuracy</b>	<i>Torsion Base BSG:</i> 3000d NTEP (3000d EC /OIML) <i>Torsion Base BSF:</i> 5000d NTEP (3000d EC /OIML) <i>Diamond Base BS:</i> 5000d NTEP (5000d EC /OIML)

## BASE CAPACITY/RESOLUTION

	Base size	Resolution	Resolution (Europe)
<b>IP66 BSG Torsion base</b> NEMA 4X	8.75" x 8.75" (220mm x 220mm)	6 x 0.002 lb (3 x 0.001 kg) 12 x 0.005 lb (6 x 0.002 kg)	3 x 0.001 kg 6 x 0.002 kg
	12" x 14" (310mm x 350mm)	30 x 0.01 lb (15 x 0.005 kg) 60 x 0.02 lb (30 x 0.01 kg) 100 x 0.05 lb (50 x 0.02 kg)	15 x 0.005 kg 30 x 0.01 kg 45 x 0.02 kg
<b>IP69K BSF Torsion base</b>	8.75" x 8.75" (220mm x 220mm)	5 x 0.001 lb (2.5 x 0.0005 kg) 10 x 0.002 lb (5 x 0.001 kg)	3 x 0.001 kg 6 x 0.002 kg
	12" x 14" (310mm x 350mm)	25 x 0.005 lb (12.5 x 0.002 kg) 50 x 0.01 lb (25 x 0.005 kg) 100 x 0.02 lb (50 x 0.01 kg)	15 x 0.005 kg 30 x 0.01 kg 60 x 0.02 kg
<b>IP69K BS Diamond base</b>	20" x 20" (510mm x 510mm)	100 x 0.02 lb (50 x 0.01 kg) 200 x 0.05 lb (100 x 0.02 kg)	45 x 0.01 kg N/A
	24" x 24" (610 mm x 610mm)	200 x 0.05 lb (100 x 0.02 kg) 500 x 0.1 lb (220 x 0.05 kg)	90 x 0.02 kg 200 x 0.05 kg

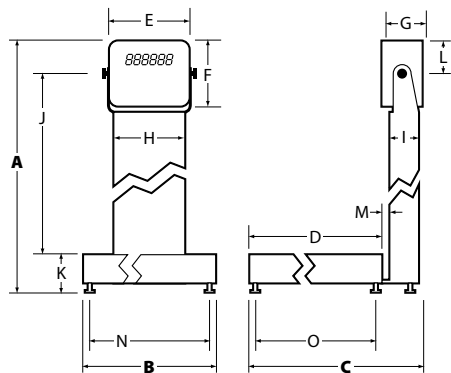

## DIMENSIONS (inches)

Base Size	a	b	c	d	e	f	g	h	i	j	k	l	m	n	o
<b>8.75" x 8.75"</b>	18.4	8.75	11.83	8.75	8.25	6.5	3.72	6.77	2.58	11.58	3.70	3.00	0.72	6.63	6.67
<b>12" x 14"</b>	18.4	13.75	15.33	12.25	8.25	6.5	3.72	6.77	2.58	10.96	4.31	3.00	0.78	11.50	10.00
<b>20" x 20"</b>	35.59	19.85	26.97	19.85	8.25	6.5	3.72	6.77	3.15	29.25	4.31	3.00	3.94	18.73	18.75
<b>24" x 24"</b>	35.59	23.85	30.90	23.85	8.25	6.5	3.72	6.77	3.15	29.25	4.31	3.00	2.76	22.25	22.50

## DIMENSIONS (mm)

Base Size	a	b	c	d	e	f	g	h	i	j	k	l	m	n	o
<b>220mm x 220mm</b>	468	208	301	223	210	165	95	172	66	294	94	76	20	168	170
<b>310mm x 350mm</b>	468	349	389	311	210	165	95	172	66	279	110	76	20	292	254
<b>510mm x 510mm</b>	904	504	685	504	210	165	95	172	80	743	110	76	100	476	476
<b>610mm x 610mm</b>	904	606	785	606	210	165	95	172	80	743	110	76	70	572	572

## INPUT/OUTPUT

<b>Remote Inputs</b>	Three logic level inputs for Zero, Print, Tare, Units or F1
<b>Standard Outputs</b>	Three set point outputs, open collector design
<b>Serial Ports</b>	Two serial ports: - Comm 1 RS232 full duplex - Comm 2 RS232 full duplex Or - Comm 1 RS232 full duplex with handshaking - Comm 2 Not available Programmable serial response to ASCII input SMA protocol, broadcast, inquire
<b>USB Host</b>	Printer input or USB flash memory
<b>Ethernet</b>	Ethernet IP, FTP, Modbus TCP and DHCP
<b>Wireless</b>	Optional internal 802.11b/g

## ELECTRICAL

<b>Power Requirements</b>	<i>Line voltage:</i> 90-264 VAC (110-240 VAC nominal), frequency 50 or 60 Hz or 12 to 36 VDC <i>Power consumption:</i> estimated at 200 mA at 12 VDC for one weight sensor and 250 mA at 12 VDC for six weight sensors.
<b>Excitation</b>	5 VDC, short circuit protected Supports up to six 350 ohm weight sensors 4 or 6 conductors with sense leads
<b>Analog Signal Input Range</b>	-1 mV/V to 5 mV/V
<b>Analog Signal Sensitivity</b>	0.1 $\mu$ V/V/divisions minimum 0.5 $\mu$ V/V/divisions recommended
<b>Circuitry Protection</b>	RFI, EMI and ESD protection

## OPTIONS

<b>PC Card (choose one)</b>	<i>USB device card:</i> Provides USB interface to PC <i>Wireless internal card:</i> 802.11b/g wireless data communications, 200ft (60m) distance between receivers subject to working environments <i>Current loop card:</i> Current Loop and RS485/RS422
<b>Watertight Gland</b>	<i>Choose one:</i> USB or Ethernet rubberized and sealed with 6" lead
<b>External Relay Box (column mounted)</b>	IP69K easy to clean external relay box to be housed in the rear of column and to hold up to 3 OPTO22 relays for running trips alarms or external light stacks
<b>Light Stack (column mounted)</b>	Light stack and stand for retrofitting to external relay box
<b>External Battery (column mounted)</b>	External IP69K removable battery pack with dry area external recharger. 16 hours operation between charges (charge time 8 hours).
<b>Stand Kit</b>	For wall mounting indicator

## APPROVALS

<b>Agencies</b>	NTEP (US) Class III/IIIL 5,000 d (CC#11-096, CC#88-104, CC#12-035, CC#03-067) OIML / EC Class III 3,000 d AM (Measurement Canada) (AM5841C, AM5557, AM5846, S.WA3094) CE (European and UK) cUL North America / Canada Certified by NSF to NSF/ANSI Standard 3-A 14159-1 -2010 IP69K
-----------------	---



Measurement  
Canada Approved  
AM-5841C



**Avery Weigh-Tronix - USA**  
1000 Armstrong Drive,  
Fairmont, MN 56031-1439 USA  
usinfo@awtxglobal.com  
Toll-Free: (800) 533-0456  
Phone: (507) 238-4461

**Avery Weigh-Tronix - UK**  
Foundry Lane, Smethwick,  
West Midlands B66 2LP UK  
info@awtxglobal.com  
Phone: +44 (0) 8453 66 77 88  
Fax: +44 (0) 121 224 8183

# Avery Weigh-Tronix

Please call us or visit [www.averyweigh-tronix.com](http://www.averyweigh-tronix.com)



© Avery Weigh-Tronix group of companies 2012. All rights reserved. Avery Weigh-Tronix is a registered trade mark of the Avery Weigh-Tronix group of companies. This publication is issued to provide outline information only which, unless agreed by an Avery Weigh-Tronix group company in writing, may not be regarded as a representation relating to the products or services concerned. This publication was correct at the time of going to print however, Avery Weigh-Tronix reserves the right to alter without notice the specification, design, price or conditions of supply of any product or service at any time.  
Design registration applied for.